


HYDROSTATIC & REVERSIBLE



TRH

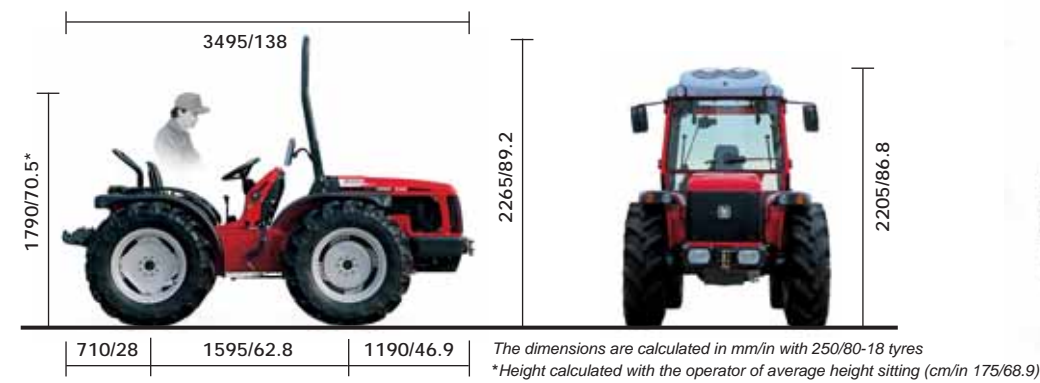

Tractor people

TRH

www.antonio carraro.com



TRH 9400

Chassis	"ACTIO" – Full chassis with oscillation • Steering wheels • 4 equal wheel drive • Reversibility RGS						
Engine Type	Diesel Direct Injection						
N° Cylinders	4 Turbo						
Displacement (CC)	2800						
Power kW/HP (97/68/CE)	62,5/85						
Maximum engine revs	2600						
Torque max (Nm/revs)	290/1400						
Cooling	Water						
Tank Capacity (litres/gal)	60/16						
Transmission	Hydromechanical – Continual variation of forward speeds in both drive direction from 0>40 Km/h with a mechanical selector of the 4 speed variator – "Automotive Eco-Power" device and Speed Fix						
PTO	Rear, independent and synchronised at 540/540E rpm with progressive electrohydraulic engagement						
Shaft	Profile 1" 3/8 with 6 splines with facilitated engagement						
Transmission clutch	Hydraulic controll						
Drive disengagement	Electro-hydraulic control on the front						
Hydraulic Lift	Position and draft control with 3 point hitch						
Operating Pressure (bar)	160						
Capacity (N/Kp - N/lbs)	22540/2300 - 22540/5070						
Steering	Hydrostatic with 2 cylinders						
Brakes	Standard: Hydraulic front and rear disk brakes in oil bath - Independent rear steering brakes Emergency and parking: band type on transmission						
Platform	Suspended on Silent Block						
Tyres	250/80-18	320/70 R20	11.5/80-15.3	320/65 R18	300/70 R20	400/55-17.5	31x15.50-15
Minimum external width (mm/in)	1350/53.1	1435/56.5	1425/56.1	1460/57.5	1410/55.5	1690/66.5	1690/66.5
Ground clearance (mm/in)	275/10.8	335/13.2	275/10.8	275/10.8	310/12.2	260/10.2	240/9.45
Weight in order of speed:							
With roll bar (Kg/lbs)	1940÷2040 - 4820÷4500						
With cab (Kg/lbs)	2090÷2190 - 4610÷4830						
Standard Features	Reversible control tower • Front or front/rear differential locks with electrohydraulic control • Hydraulic system with 2 separate hydraulic pumps • Adjustable steering wheel • Lifting bar with quick release couplings • Adjustable, suspension seat • Safety Belts • Foldable safety frame • Adjustable wheel disks • 3 lever rear ancillary hydraulic system with oil return • Rear adjustable height tow hitch • Front tow hitch • Multifunctional dashboard with digital ground speed and PTO rpm indication						
Optional extras	"Star Light" cab with heating, soundproofing and air conditioning system • Power lift with hydraulic 3rd point and vertical adjusting links • Lifting and hydraulic outlets controlled by "ON/OFF" or "Proportional" Joystick • Front power lift • Front PTO 1000 rpm with electro-hydraulic engagement • Rear PTO 540/1000 rpm • Adjustable lifting bar with quick release couplings • Adjustable lifting bar with Cat. 1-2 sphere • Rear oscillating tow hitch • Slider trailer hook • Front ballast with hitch • Front and rear ballast weights • Cast iron wheel centre for 20" rear wheels						

The description and illustrations in this brochure are provided simply for information purposes; they are not binding and may be varied at any time without notice.

Antonio Carraro srl
Via Caltana, 24
35011 Campodarsego Padova
Tel +39 049 9219921
Fax +39 049 9219944
E-mail info@antonio carraro.it

